

AS-SFB3512D/VRC Frequency 30-512MHz MULTIBAND VHF/UHF TACTICAL VEHICULAR WHIP ANTENNA

NSN:5985-01-497-7004

SFB-3512/VRC
DB30512-M




Features

- ◆ Maximum performance
- ◆ Lower vertical signature
- ◆ Instantaneous bandwidth
- ◆ No tuners or operator intervention required
- ◆ Diplexer included
- ◆ MIL-STD-810 compliant fiberglass composite antenna
- ◆ ITAR governed item – requires DOS license prior to export

Specifications

Frequency range	30~512MHz
Power rating	75 Watts 100 Watts maximum
Dual Feed	Diplexer Included
Input Impedance	50Ω nominal
VSWR	3.5:1 or less
HV Protection	20KV RMS
Color	383 Green, Black, Tan
Mounting Pattern	4-Hole US and NATO base with spring
RF Connection	Type "N" Female (BNC available)
Height	2.54M(8.3ft)
Weight	2.4kg(5.25lbs)
Wind rating	60m/s(216km/h)=134mph
Operating Temp	-45°C to +70°C, -49°F to +158°F

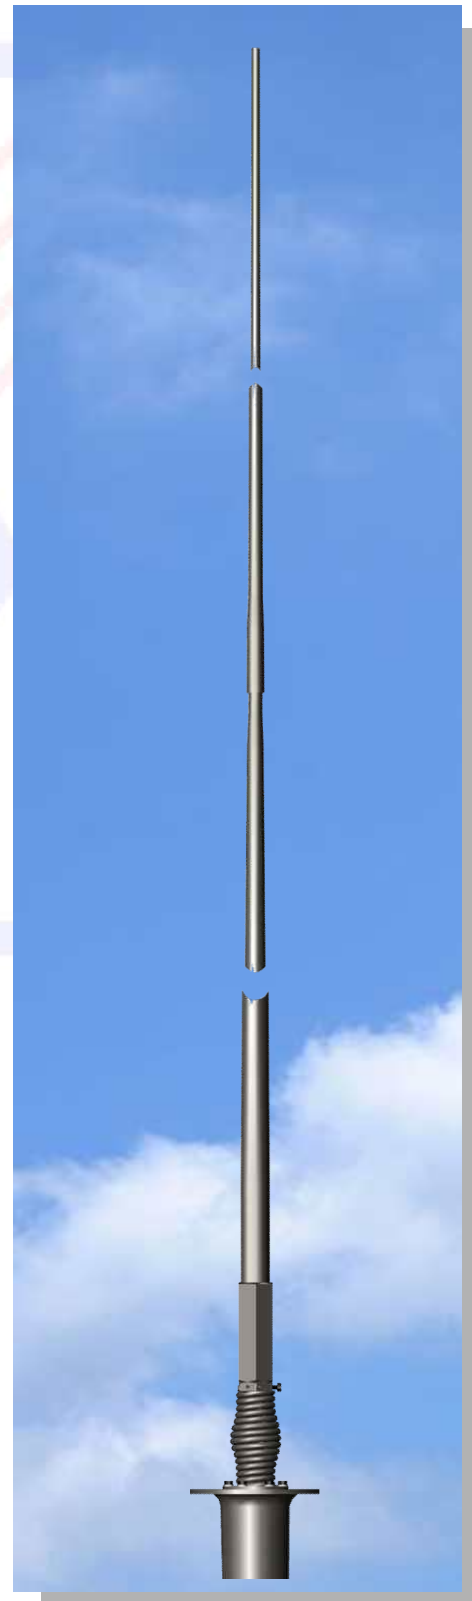

WISUNG ANTENNA & ELECTRONICS CO., LTD.

Sang-Nok 5Gil 7~9, Soo-Jung Dong, Dong-Gu, Busan, KOREA
Tel. +82-51-464-0707 / Fax. +82-51-464-0703

<http://www.wisung.co.kr>
E-mail: wisung@wisung.co.kr