

AS-HP3512/VRC Frequency 30-512MHz HIGH PERFORMANCE VHF/UHF TACTICAL VEHICULAR WHIP ANTENNA


Features

- ◆ AS-3916/VRC in the V30-88VM/VRC and V30-88VM/VRC.WLAN.GPS
- ◆ AS-3900A/VRC in the V30-88MHz frequency range.
- ◆ Lower vertical signature
- ◆ Instantaneous bandwidth
- ◆ No tuners or operator intervention required
- ◆ Diplexer included
- ◆ MIL-STD-810 compliant fiberglass composite antenna
- ◆ ITAR governed item – requires DOS license prior to export



Specifications

Frequency range	30~512MHz
Power rating	200 Watts nominal
Dual Feed	Optional with diplexer
Input Impedance	50Ω nominal
VSWR	3.5:1 or less
HV Protection	20KV RMS
Color	383 Green, Black, Tan
Mounting Pattern	4-Hole US and NATO base with spring
RF Connection	Type "N" Female (BNC available)
Height	2.79M(9.2ft)
Weight	5.2kg(11.5lbs)
Wind rating	60m/s(216km/h)=134mph
Operating Temp	-45°C to +70°C, -49°F to +158°F

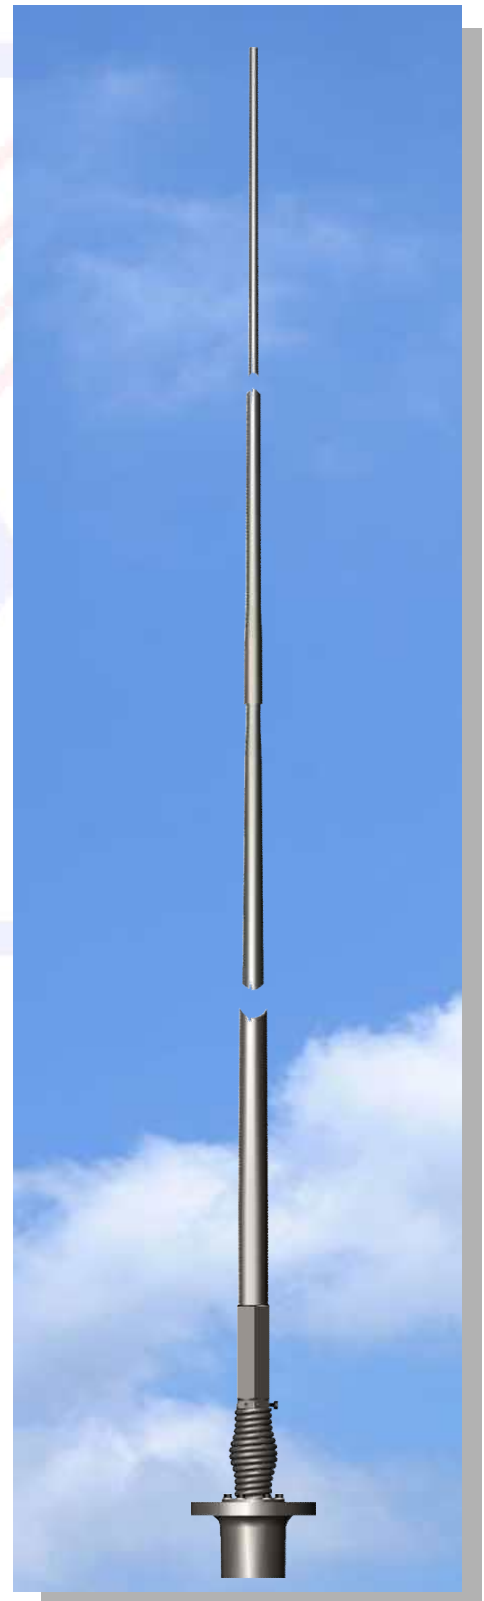

WISUNG ANTENNA & ELECTRONICS CO., LTD.

Sang-Nok 5Gil 7~9, Soo-Jung Dong, Dong-Gu, Busan, KOREA

Tel. +82-51-464-0707 / Fax. +82-51-464-0703

<http://www.wisung.co.kr>

E-mail: wisung@wisung.co.kr